


# EDGEMERE® SINGLE CONTROL LAVATORY FAUCET



#### **MODEL NUMBER:**

☐ 7018.101 Single Control Lavatory Faucet
Metal Speed Connect pop-up drain. Metal Lever
Handle.

AVAILABLE ACCESSORY: 7018.101P Escutcheon Plate only

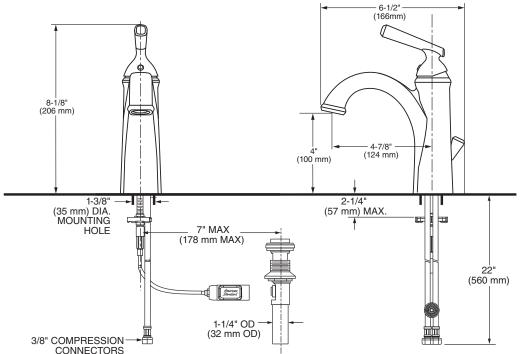

### **GENERAL DESCRIPTION:**

Washerless 35 mm ceramic disc valve cartridge with integral hot limit safety stop. Braided flexible supply hoses with 3/8" compression connectors. 20" (500 mm) long flexible stainless steel drain cable is pre-assembled to faucet body. Metal Speed Connect® drain body with 1-1/4" (32 mm) tail piece. 1.2 gpm/4.5 L/min. maximum flow rate. Fitting can be installed as single hole mounting method or on 4" centers using optional escutcheon plate.

## **PRODUCT FEATURES:**

**Ceramic Disc Valve Cartridge:** Assures a lifetime of smooth handle operation and drip-free performance.

#### **Exclusive Speed Connect Metal Drain:**

- Fewer parts. Installs in less time.
- No adjustments required seals the first time, every time.
- Flexible stainless steel cable installs effortlessly in tight spaces.

**Lead Free:** Faucet contains  $\leq 0.25\%$  total lead content by weighted average.

**Choice of Finishes:** Chrome, Brushed Nickel or Legacy Bronze.

#### SUGGESTED SPECIFICATION:

Single control lavatory faucet shall feature a metal body and metal lever handle. Shall also feature washerless ceramic disc valve cartridge. Shall also feature a metal drain body with stainless steel cable actuation. Fitting shall be American Standard Model # 7018.101.\_\_\_\_.

© 2017 AS America Inc. 4/17




# **EDGEMERE®** SINGLE CONTROL LAVATORY FAUCET

# **CODES AND STANDARDS**

These products meet or exceed the following codes and standards:

**ANSI A117.1 ASME A112.18.1 CSA B125.1** NSF 61/Section 9 **NSF 372** 

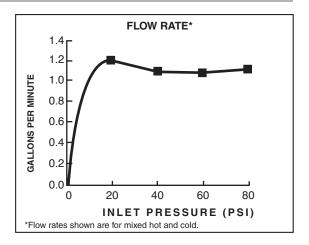

		Finish Options		
		Polished Chrome	Legacy Bronze	Brushed Nickel
Product Number	Description	002	278	295
7018.101	Edgemere® single control lavatory faucet.  Metal Speed Connect® pop-up drain.			
7018.101P	Optional Escutcheon Plate Only (For mounting on 4" centers)			

Meets the American Disabilities Act Guidelines ANSI A117.1 Requirements for the physically challenged.