



Technical Sheet

CONTACTLESS VERSACOOLER® II WITH CONTACTLESS VERSAFILLER® WITH VERSAFILTER

- PGF8EBFT
- PGFEBFT

Suggested Specification

Model PGF8EBFT shall deliver 8.0 gph of 50°F water at 90°F ambient and 80°F inlet water per ASHRAE 18 testing. Model PGF8EBFT shall include PGF8ACT and the VersaFiller® Sports Bottle Filler with contactless activation; lower unit shall have infrared sensor to activate the flow of water for the cooler. VersaFiller components contain Freshield®, which utilizes a silver-based antimicrobial compound to protect the surfaces from discoloration, odors and degradation caused by the growth of micro-organisms and mildew. Basin shall be designed to eliminate splashing and standing water. Water saver bubbler to reduce waste water by 50% and shall have flexible guard and operate between 20 and 100 PSI. Shall use R-134a refrigerant. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards, and comply with NSF/ANSI 61 and NSF/ANSI 372.

	<ul style="list-style-type: none"> • Built-in 100 micron strainer stops particles before they enter the waterway • Waterways are lead-free in materials & construction • Flexible one-piece water saver bubbler infused with silver-based antimicrobial additive
Features:	<ul style="list-style-type: none"> • Stainless steel top and heavy duty galvanized steel frame • Contactless activation on both fountain and VersaFiller bottle filler • External stream height adjustment on lower unit • Built-in filter monitor and bottle counter
Finish:	<ul style="list-style-type: none"> • Standard: Greystone powder coat on galvanized steel • Sandstone powder coat on galvanized steel; stainless steel (at additional cost)
Filtration:	<ul style="list-style-type: none"> • VersaFilter is Certified to NSF/ANSI 42 and 53 for lead, chlorine, taste and odor reduction to 1,250 gallons
Power:	115 Volts, 60 Hz
Bubbler Style:	Water Saver
Activation By:	Contactless Sensor
Mounting Type:	Wall Mounted
Chilling Option:	8.0 gallons per hour* Non-refrigerated
Full Load Amps:	PGF8EBFT - 4.6 PGFEBFT - 0.2
Rated Watts:	PGF8EBFT - 460 PGFEBFT - 11
Dimensions (D x W x H):	18-5/8" x 17-5/8" x 51-5/32"
Approx. Net Weight:	PGF8EBFT - 74 lbs PGFEBFT - 37 lbs
Installation Location:	Indoor



Models

- PGF8EBFT delivers 8.0 gallons of chilled drinking water per hour.
- PGFEBFT is a non-refrigerated fountain.

Installation

- Prior to roughing consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions and wall mounting bracket
- Removable side and front panels provide easy access for installation.

Options

- One piece chrome plated brass bubbler (036700-001)

Limited 5-Year Warranty

(Continental limits of the United States and Canada)
Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Certifications/Compliance

- Certified to UL 399 and CAN/CSA C22.2 No.120 (electric water coolers only)
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act
- These water coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed



WARNING:


Cancer and Reproductive Harm
www.P65Warnings.ca.gov



*Industry standard rating condition at 90°F ambient, 80°F inlet water and 50°F drinking water temperature

Specifications subject to change without notice

CONTACTLESS VERSACOOLER® II WITH CONTACTLESS VERSAFILLER® WITH VERSAFILTER

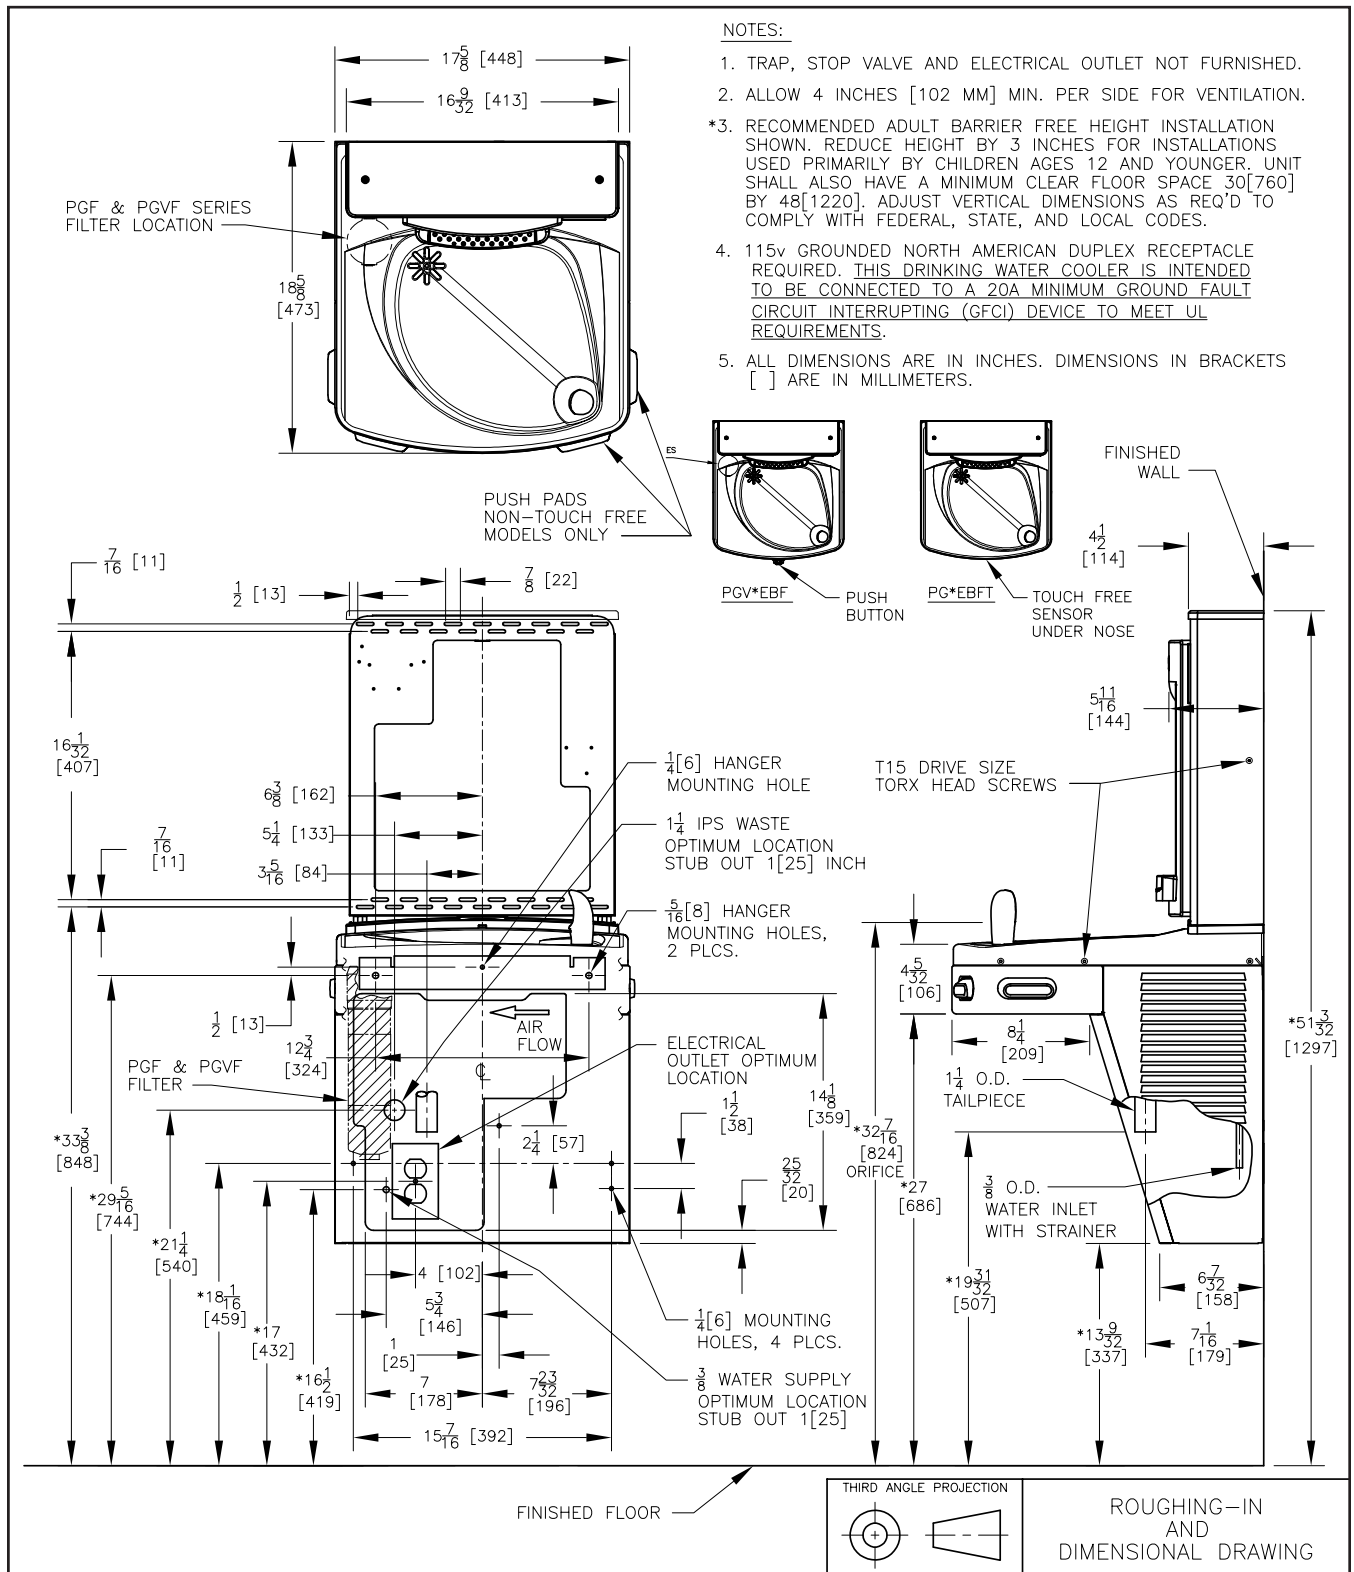

OASIS INTERNATIONAL

www.oasiscoolers.com

222 East Campus View Blvd.
Columbus, OH 43235

1-800-646-2747