




# SYMMONS® Temptrol®

the smart choice™

## PRESSURE BALANCING TUB/SHOWER VALVE BODY SPECIFICATION SUBMITTAL

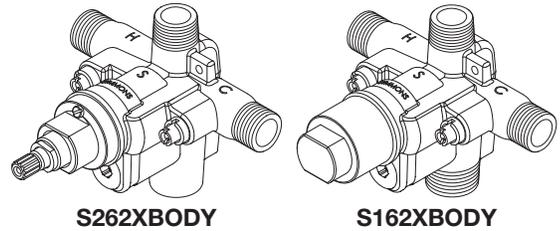

### MODEL NUMBERS

- S262XBODY**  
Pressure Balancing tub/shower valve body with integral diverter and service stops
- S162XBODY**  
Pressure Balancing tub/shower valve body with pressure testing cap, integral diverter and service stops

### FEATURE HIGHLIGHTS

- Brass, bronze and stainless steel construction
- Pressure balancing mixing valve to maintain safe shower temperature
- Integral diverter control
- Adjustable stop screw to control maximum hot water temperature to valve
- Integral service stops allow water shut-off for valve servicing
- 4 port valve body in common plane
- Inlets: 1/2" IPS and 1/2" sweat
- Outlets: 1/2" IPS and 1/2" sweat
- Accommodates back to back installations
- Accommodates thin wall installations
- Stringer mounts included

### OPTIONS/MODIFICATIONS

- BR**      Temptrol Rapid Install™ Bracket
- CHKS**    Integral check stops for use in installations where a positive shut-off device is used downstream of valve
- RV**      Reverse seat for back to back installations

### INLET ADAPTERS

- CP**      CPVC fittings
- P1**      PEX crimp fittings
- P2**      PEX expansion fittings
- P3**      ProPress fittings

### COMPLIANCE

- ASME A112.18.1/CSA B125.1
- ASSE 1016
- Buy American Act Compliant



### WARRANTY

**Limited Lifetime** - to the original end purchaser in consumer installations.  
**5 Years** - for commercial installations.  
 Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.

