

# TOTO®

# MS626234CEFG

## Aimes® One-Piece High-Efficiency Toilet, 1.28 GPF

### FEATURES

- TORNADO FLUSH® system, high-efficiency (1.28 GPF/4.8 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Specially designed to accommodate a WASHLET®+
- Skirted design
- Universal Height
- Elongated front bowl and seat
- 12" Unifit Rough-in
- Chrome plated trip lever
- Seat and cover made from Urea resin

### MODELS

- **MS626234CEFG#01**  
With CEFIONTECT ceramic glaze & includes seat SS234

### COMPONENTS

- **SS234**  
Slim Elongated SoftClose® Seat

#### Optional Components

- **SS124**  
SoftClose Seat
- **TSU03W.10R**  
10" Unifit Rough-In
- **TSU03W.14R**  
14" Unifit Rough-In

### COLORS/FINISHES

- #01 Cotton

### PRODUCT SPECIFICATION

The one-piece high-efficiency TORNADO FLUSH system toilet shall be 1.28 GPF/4.8 LPF. Toilet shall be 12" Unifit rough-in. Toilet shall have optional CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall have elongated front bowl with SoftClose seat and Polished Chrome trip lever. Toilet shall be TOTO Model MS626234CEFG#01.



-  TORNADO FLUSH
-  Skirted Design
-  CEFIONTECT
-  Universal Height

### CODES/STANDARDS

- Meets or exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- Complies with CA Prop 65 warning requirements



# MS626234CEFG

## Aimes® One-Piece High-Efficiency Toilet, 1.28 GPF


### SPECIFICATIONS

|                            |   |
|----------------------------|---|
| <b>Water Use</b>           | 1.28 GPF (4.8 LPF)  |
| <b>Flush System</b>        | TORNADO FLUSH®  |
| <b>Min. Water Pressure</b> | 8 psi (Flowing)   |
| <b>Water Surface</b>       | 7-3/4" x 9-3/8"   |
| <b>Trap Diameter</b>       | 2-1/8"  |
| <b>Rough-in</b>            | 12" (10" & 14" Optional)  |
| <b>Trap Seal</b>           | 2-1/8"  |
| <b>Warranty</b>            | One Year Limited Warranty                                       |
| <b>Material</b>            | Vitreous China  |
| <b>Shipping Weight</b>     | 122.5 lbs.  |
| <b>Shipping Dimensions</b> | 32" L x 20" W x 17-3/4" H <sup>1</sup> x 28-3/4" H <sup>2</sup> |

### INSTALLATION NOTES


#### Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

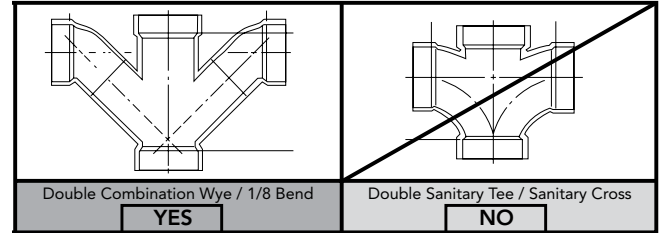

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

### DIMENSIONS

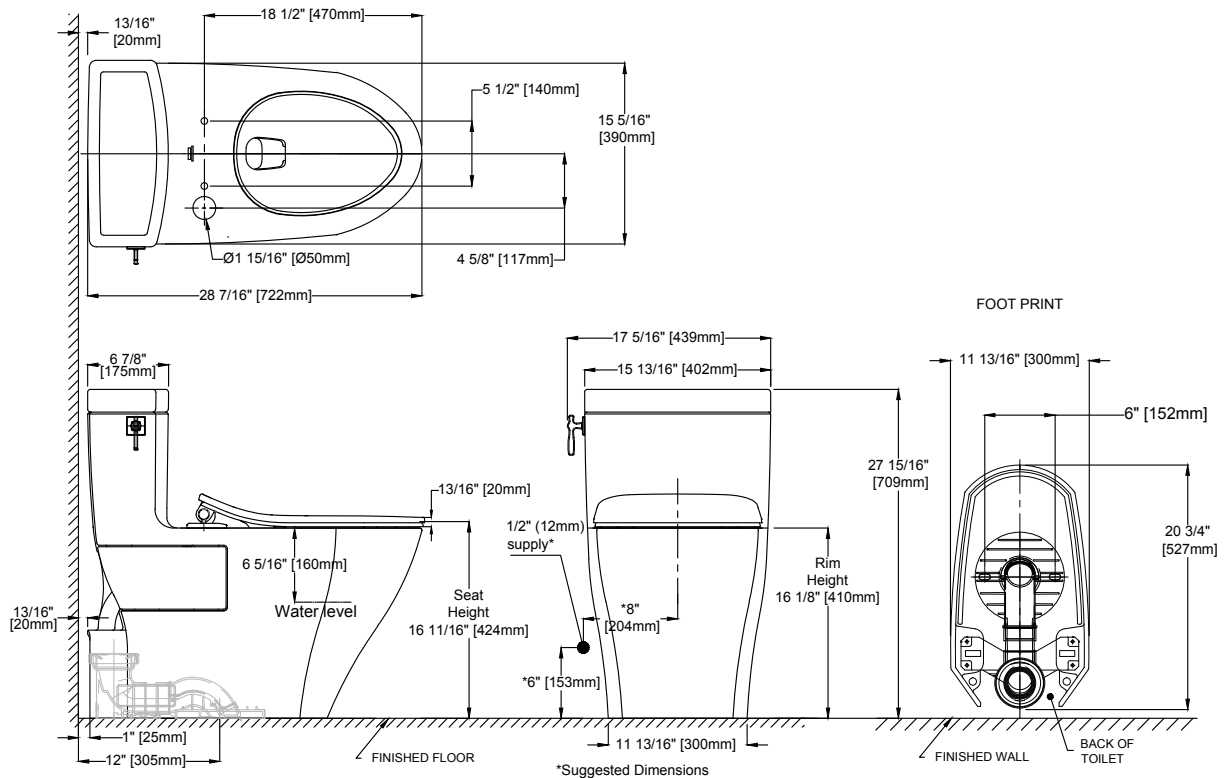

**TOTO®**

*These dimensions and specifications are subject to change without notice*